



Converter RS-232 to RS-422


Item No. 500210



With the RS-232/RS-422 converter it is possible to control the DLS sensors through an industrial interface. Consequently, it's possible to control DLS/FLS devices which are placed remotely (up to 1200 m).

The RS-232 to RS-422 Converter is an IP20 module and is mountable on a 35 mm DIN rail. Furthermore, it's possible to control up to 10 DLS/FLS Laser Distance Sensors.

Application example

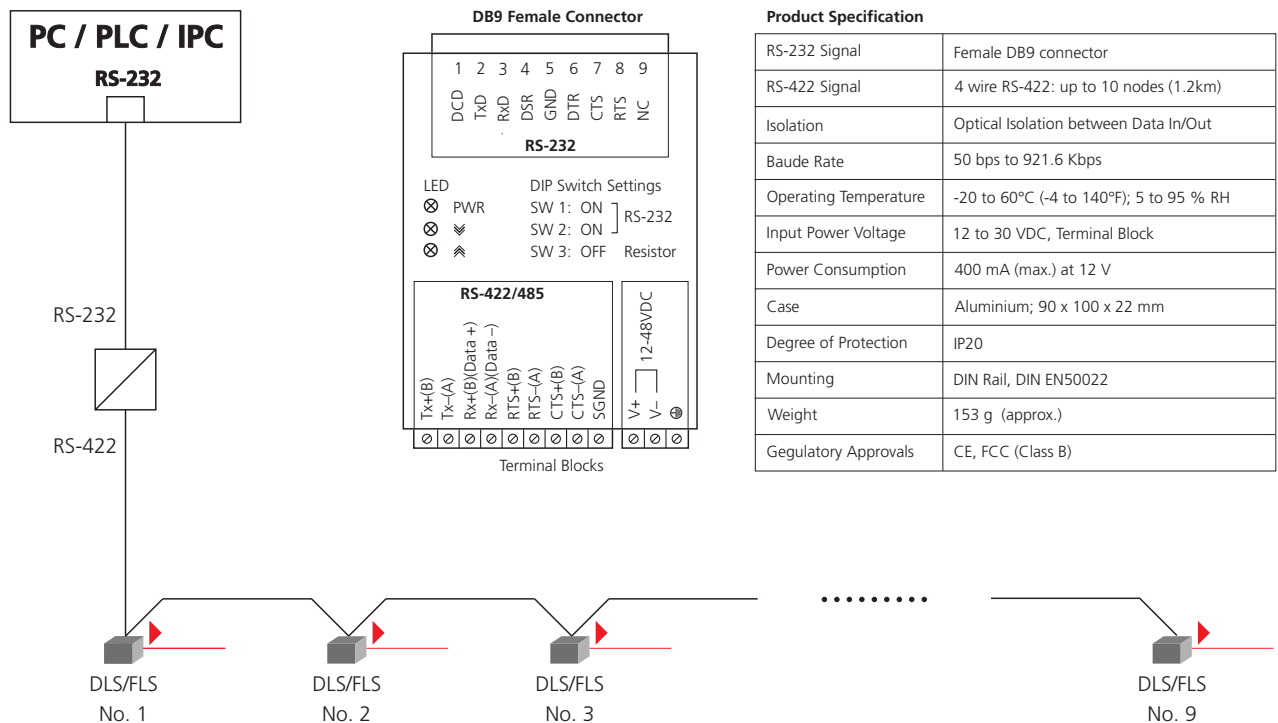

Order information

Item No.	Description	Packaging unit
500210	Converter RS-232 to RS-422 IP20 module, mountable on 35 mm DIN rail applicable for DLS/FLS	1 piece