



Numeric digital display 6 digits

Item No. 500215




For displaying the measuring results with millimetre precision, directly connect the DLS or FLS measuring device to this numeric display via the sensor's RS-422 serial interface.

The display is delivered completely configured for the default setting of the DLS/FLS sensor.

For detailed information, please see our Application Note AN2001 «Numeric digital display» at our website.

Dimensions:


(in mm)

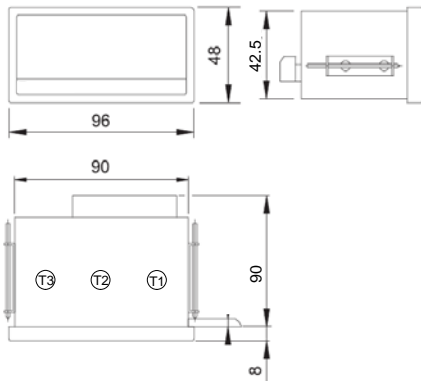

Specification:

General:	Power supply	18...35 V DC
	Power consumption	approx. 2.5 VA (110mA@24V)
	Housing	Plastic, black
	Connection	Plug-in terminal strips
	Operating temperature	-20 ... 65°C
	Numeric display	0 ... 9, various ASCII characters, height 14 mm
	Interface	RS-485
	Baud Rate	19200 / 7 /even
Display:	Panel cut out	92 x 45 mm
	LED	red
	Front frame	96 x 48 mm
	Weight	approx. 180 g
	Dimensions	see sketch
	Reading distance	1 ... 5 m

Application example:

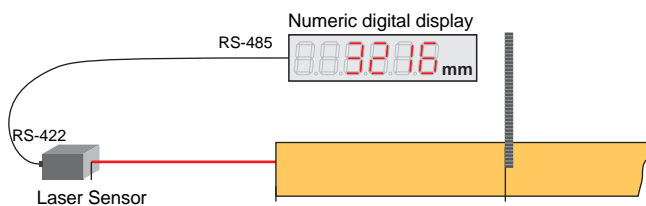

Order information

Item No.	Description	Packaging unit
500215	Numeric digital display 6 digits Character height 14mm; LED red; RS-485; Reading distance: 1...5m applicable for DLS/FLS	1 piece